

HYDRA RAM[®]

DEMOLITION & RECYCLING EQUIPMENT



MK SERIES



HARDOX[®]
IN MY BODY

**SPEED
RAIP**

INTERCHANGEABLE
TOOTH SYSTEM

7 MODELS MULTIPROCESSORS FOR EXCAVATORS 9 ~ 100 TON


Hydraulic
jaw change
in 5 minutes!




MK SERIES

HYDRA RAM®

DEMOLITION & RECYCLING EQUIPMENT

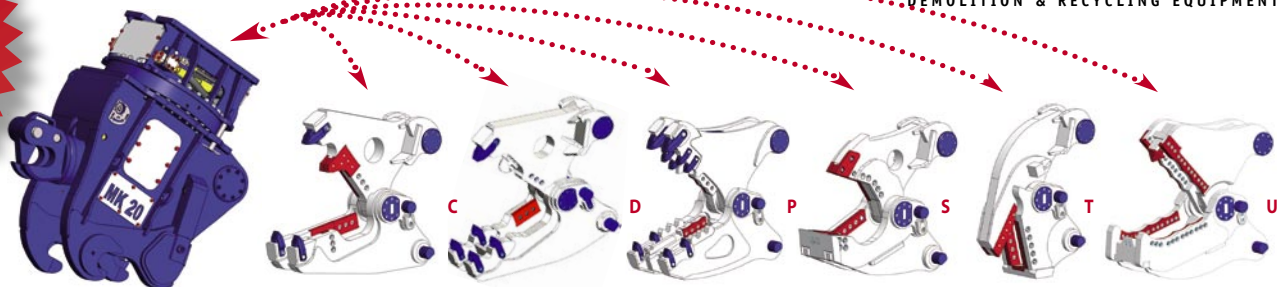

		MK-10	MK-15	MK-20	MK-25	MK-35	MK-50	MK-70
(1)	t.	9-18	18-25	25-35	35-45	45-65	55-78	75-100
	bar	310	310	310	310	310	340	340
	l/min.	150-250	180-250	200-300	250-350	300-400	400-500	450-600
	max bar	140	140	140	140	140	140	140
	max l/min.	10	10	10	10	10	30	30
	open/close (sec)	1,1/2,0	1,6/2,1	2,0/2,7	2,6/2,7	2,8/2,7	3,2/3,5	3,0/3,7

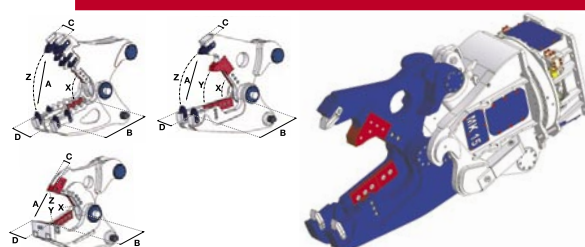

		MK-10C	MK-10D	MK-10P	MK-10S	MK-10U	MK-10T
kg.		1080	1010	1030	980	1120	920
A	mm.	580	580	660	360	420	180
B	mm.	560	560	580	400	490	300
C	mm.	100	100	220	75	200	90
D	mm.	290	290	430	300	370	280
	mm.	350	140	140	370	440	280
X	t.	220	220	85	250	160	145
Y	t.	60	60	60	100	75	90
Z	t.	40	40	40	60	50	75

		MK-15C	MK-15D	MK-15P	MK-15S	MK-15U	MK-15T
		1940	1860	1880	1830	1980	1790
		730	730	750	430	500	270
		720	720	660	470	615	360
		120	120	300	100	275	115
		320	320	470	340	395	310
		430	220	220	460	530	320
		420	420	190	420	260	225
		100	100	100	180	115	160
		65	65	65	95	80	115

		MK-20C	MK-20D	MK-20P	MK-20S	MK-20U	MK-20T
kg.		2585	2450	2510	2460	2610	2380
A	mm.	810	810	880	480	635	310
B	mm.	800	800	790	525	750	465
C	mm.	130	130	310	120	295	145
D	mm.	350	350	485	380	415	360
	mm.	480	260	260	510	660	400
X	t.	510	510	205	530	260	270
Y	t.	125	125	125	230	150	200
Z	t.	80	80	80	120	100	140

		MK-25C	MK-25D	MK-25P	MK-25S	MK-25U	MK-25T
		3290	3180	3210	3170	3340	3060
		850	850	905	500	700	340
		810	810	820	560	780	485
		130	130	360	130	320	150
		410	410	570	435	520	410
		500	260	260	565	690	420
		700	700	230	720	350	360
		155	155	135	290	180	260
		100	100	105	145	125	170

		MK-35C	MK-35D	MK-35P	MK-35S	MK-35U	MK-35T
kg.		3960	3880	3920	3860	4030	3720
A	mm.	880	880	980	510	820	370
B	mm.	875	875	860	565	840	520
C	mm.	130	130	390	130	370	155
D	mm.	410	410	640	435	600	420
	mm.	500	260	260	565	780	420
X	t.	740	740	330	740	405	380
Y	t.	175	175	180	315	240	275
Z	t.	115	115	115	160	140	190

		MK-50C	MK-50D	MK-50P	MK-50S	MK-50U	MK-50T
		5980	5860	5920	5410	6070	5320
		1020	1020	1112	590	900	400
		1000	1000	990	650	880	560
		150	150	470	150	440	170
		470	470	750	500	710	475
		580	260	260	650	840	460
		850	850	380	850	470	425
		205	205	185	360	275	305
		135	135	140	185	165	210

		MK-70C	MK-70D	MK-70P	MK-70S	MK-70U	MK-70T
kg.		8280	8140	8210	7520	8410	7380
A	mm.	1200	1200	1320	700	1020	440
B	mm.	1150	1150	1140	755	940	630
C	mm.	170	170	530	165	490	180
D	mm.	510	510	800	550	760	490
	mm.	720	325	325	755	900	530
X	t.	1100	1100	490	1100	610	550
Y	t.	270	270	245	470	385	440
Z	t.	175	175	180	240	215	270

JAW OPTIONS:

- C - Combi Jaw**
- P - Pulverizer Jaw**
- S - Shear Jaw**
- U - Universal Jaw**
- T - Tankshear Jaw**
- D - Demolition Jaw**

Main advantages:

- Constructed from durable HARDOX-400® steel
- Exchangeable wear parts in jaws
- Oil regeneration valve (speed-valve) for fast opening/closing times
- Changing of jaws hydraulically within 5 minutes
- Double bearing slewing
- Heavy duty rotation motor

(*) The above mentioned weights do not include the excavator attachment.

(†) Recommended Excavator/Equipment combination.

(DEALER)



HYDRA RAM®
DEMOLITION & RECYCLING EQUIPMENT

HYDRARAM b.v.
Meander 7
NL 9231DB SURHUISTERVEEN
The Netherlands

tel. +31 512-365981
fax. +31 512-365761
www.hydraram.com
info@hydraram.com