

HYDRA RAM[®]

ADVANCED DEMOLITION EQUIPMENT



HCC SERIES




**13 MODELLE BETONSCHEREN VON 180 BIS 12.000 KG
FÜR BAGGER VON 2 ~ 150 TONNEN**



HYDRA RAM®

ADVANCED DEMOLITION EQUIPMENT

HCC SERIES

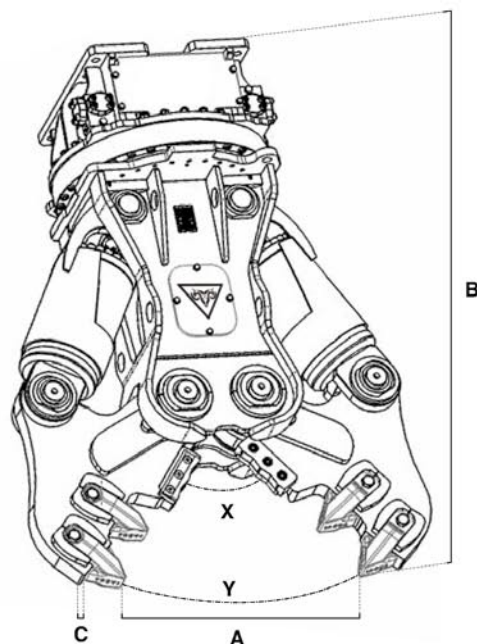

		HCC-2	HCC-5V*	HCC-10V*	HCC-13V*	HCC-17V*	HCC-22V*	HCC-27V*	HCC-40V	HCC-50	HCC-65V	HCC-85V	HCC-100V	HCC-120V
 (1)	t.	2 : 4	5 : 9	10 : 15	20 : 25	16 : 21	22 : 28	29 : 35	36 : 49	50 : 65	66 : 85	86 : 105	86 : 130	86 : 150
 **	kg.	180	550	1020	1320	1680	2130	2640	3820	4850	6430	8550	10750	12200
A	mm.	280	480	685	610	820	890	1090	1370	1500	1680	1830	2050	2305
B	mm.	1020	1300	1550	1750	1775	1900	2115	2520	2690	2950	3160	3350	3700
C	mm.	25	50	60	60	70	70	80	90	100	100	120	120	130
	mm.	90	140	140	180	180	180	220	260	325	325	325	400	400
X	t.	60	80	160	180	170	205	220	365	470	590	720	760	820
Y	t.	18	20	45	45	60	70	75	85	120	145	185	220	240
	t.	20	40	80	60	100	115	125	155	215	260	335	395	395
 N°		1	2	2	1	2	2	2	2	2	2	2	2	2
	bar	210	250	310	310	310	310	310	310	340	340	340	340	340
	l/min.	40 / 60	80 / 150	150 / 250	180 / 250	180 / 250	200 / 300	250 / 350	300 / 400	350 / 450	400 / 500	450 / 650	500 / 800	500 / 800
														
 max	bar	/	120	140	140	140	140	140	140	140	140	140	140	140
 max	l/min.	/	10	10	10	10	10	10	10	30	30	50	50	50
Ø max	mm.	15	20	25	30	30	40	40	50	60	70	80	90	100

(**) Die oben genannten Gewichte beinhalten nicht die Bagger Anbauplatte.
(1) Empfohlene Bagger/Anbauteil Kombination.

(DEALER)



HYDRA  RAM®
ADVANCED DEMOLITION EQUIPMENT

HYDRARAM b.v.
Meander 7
NL 9231DB SURHUISTERVEEN
The Netherlands

tel. +31 512-365981
fax. +31 512-365761
www.hydraram.com
info@hydraram.com

*SPECIFICATIONS IN THIS BROCHURE ARE SUBJECT TO CHANGE WITHOUT NOTICE